

Screw Compactors WASTECOM™ CPS



MULTIPLE PATENTS



HIGH-PERFORMANCE, MULTIFUNCTION, RELIABLE AND SILENT SCREW COMPACTOR

WASTECOM™ CPS Screw Compactors consist of a conveyor trough manufactured from stainless steel, a shaftless extra heavy-duty spiral in carbon steel and a patented compacting and de-watering discharge module including a special patented plug retention diaphragm.

WASTECOM™ CPS is a versatile machine for several applications in continuous or batch-type duty.

WASTECOM™ CPS Screw Compactors are used in municipal or industrial waste water treatment plants where maintenance has to be reduced to the minimum (no intermediate bearings, shaftless screw).

Technical Features


- Fabricated structure completely made from 304L / 316L SS
- Highly wear-resistant extra heavy-duty mild steel or 304/316 SS spiral
- Trough liner manufactured from HDPE high-density, low-friction polymer
- No outlet and intermediate bearing assemblies
- No mechanical components in contact with the material handled
- Outlet plug retention diaphragm made from SINT™ engineering polymer or counterweight pressor (option)
- ATEX GAS II motors available





Outlet Compaction Section with Washing System (Option)



Liner/ Slide Plates



Internal Adjustable Self-cleaning Drainage Screen

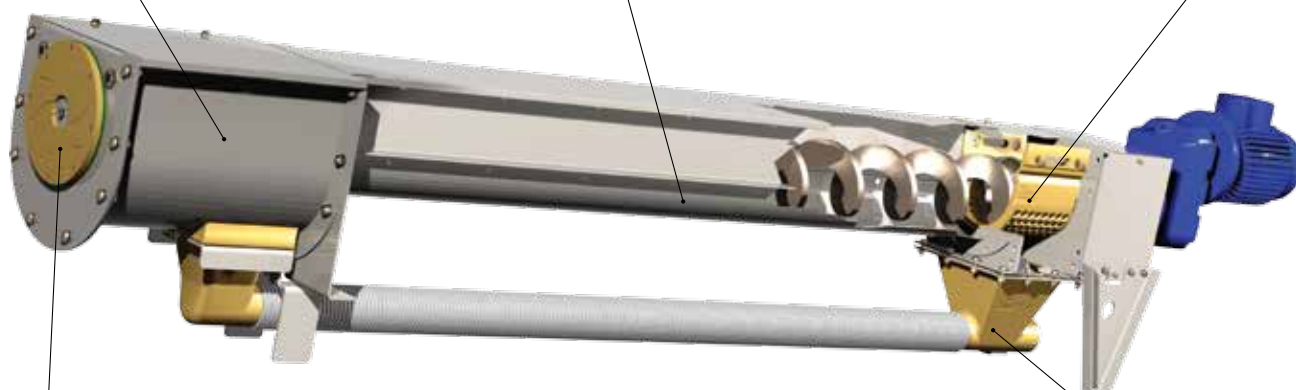

Outlet Plug Retention Diaphragm made from SINT™ Engineering Polymer in Different Degrees of Stiffness




Non-stick Liquid Collection Box

Benefits

- ✓ Three functions - one machine: conveying, dewatering and compacting;
- ✓ Up to 40% reduction of screenings volume;
- ✓ Particularly maintenance-friendly modular design;
- ✓ No machine locking even with fibrous materials;
- ✓ Fully enclosed, pollution-free, odour-free;
- ✓ Low noise level;
- ✓ Low energy consumption.

Overall dimensions

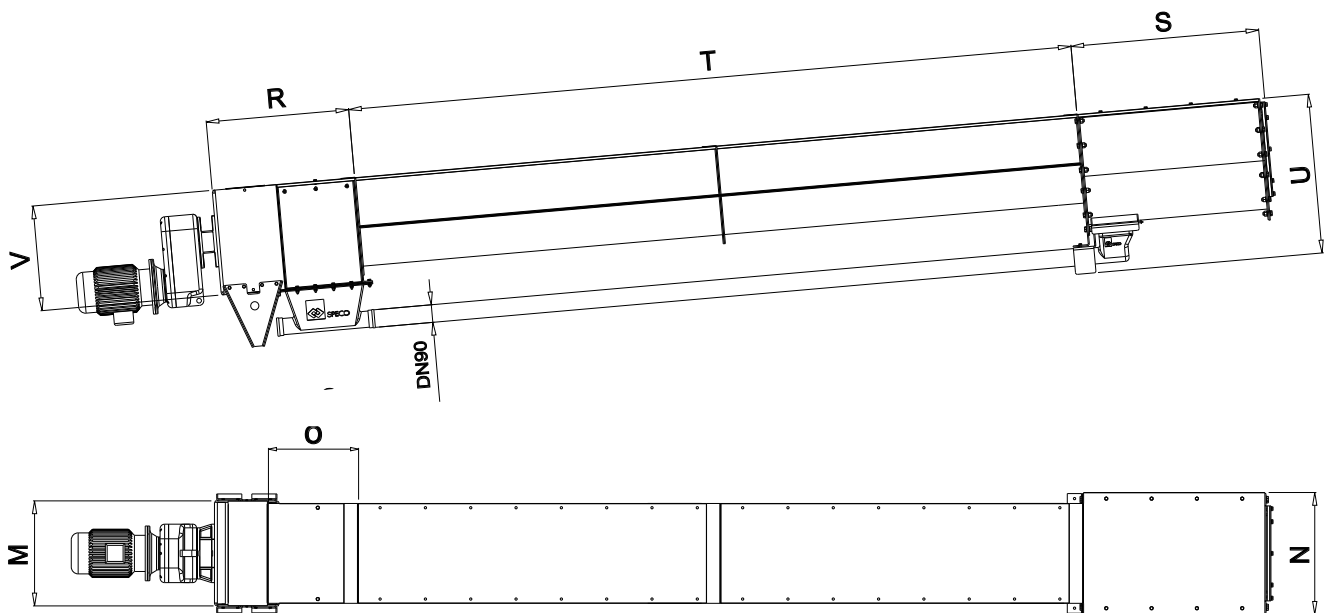

MODEL	Lc (standard)	R	Lc * min. - max.	S	U	V	M	N	O	α	Troughput Rates (m ³ /h)	kW
CPS 200	2,000	490	1,000 - 6,000	530	600	320	327	445	230	5° - 25°	2	1.5
CPS 300	3,000	606	2,000 - 8,000	750	757	440	440	545	323	5° - 25°	5	2.2
CPS 400	4,000	773	2,000 - 10,000	1,000	909	575	575	663	496	5° - 25°	8	4.0

Dimensions in mm - (*) pitch 500 mm

Accessories

- Outlet verticalizer
- Endless tube
- Bag fastening system
- Rectangular inlet hopper
- Adjustable support stands
- Support bracket
- Plug retention SINT™ diaphragm with different resistance levels
- Solenoid Valves

Application



063002389 May 2015 Rights reserved to modify technical specifications.



WAMGROUP



SPECOL



UNI EN ISO 9001
Certified Company

INQUIP
BULK MATERIAL
& DUST HANDLING

22 Beneficial Way Wangara WA 6065 ☎ (08) 6314 1100 📠 (08) 9303 9447
🌐 inquip.com.au ✉ info@inquip.com.au

ABN 15 130 794 151

PRODUCT » DENSITY » FLOW