AIR FILTRATION AIR FILTRATION

INQUIP BULK MATERIAL & DUST HANDLING

PRODUCT » DENSITY » FLOW

Distributor for WAMGROUP

RECOFIL™

Pneumatic Dust Recovery Device for Fume Filters

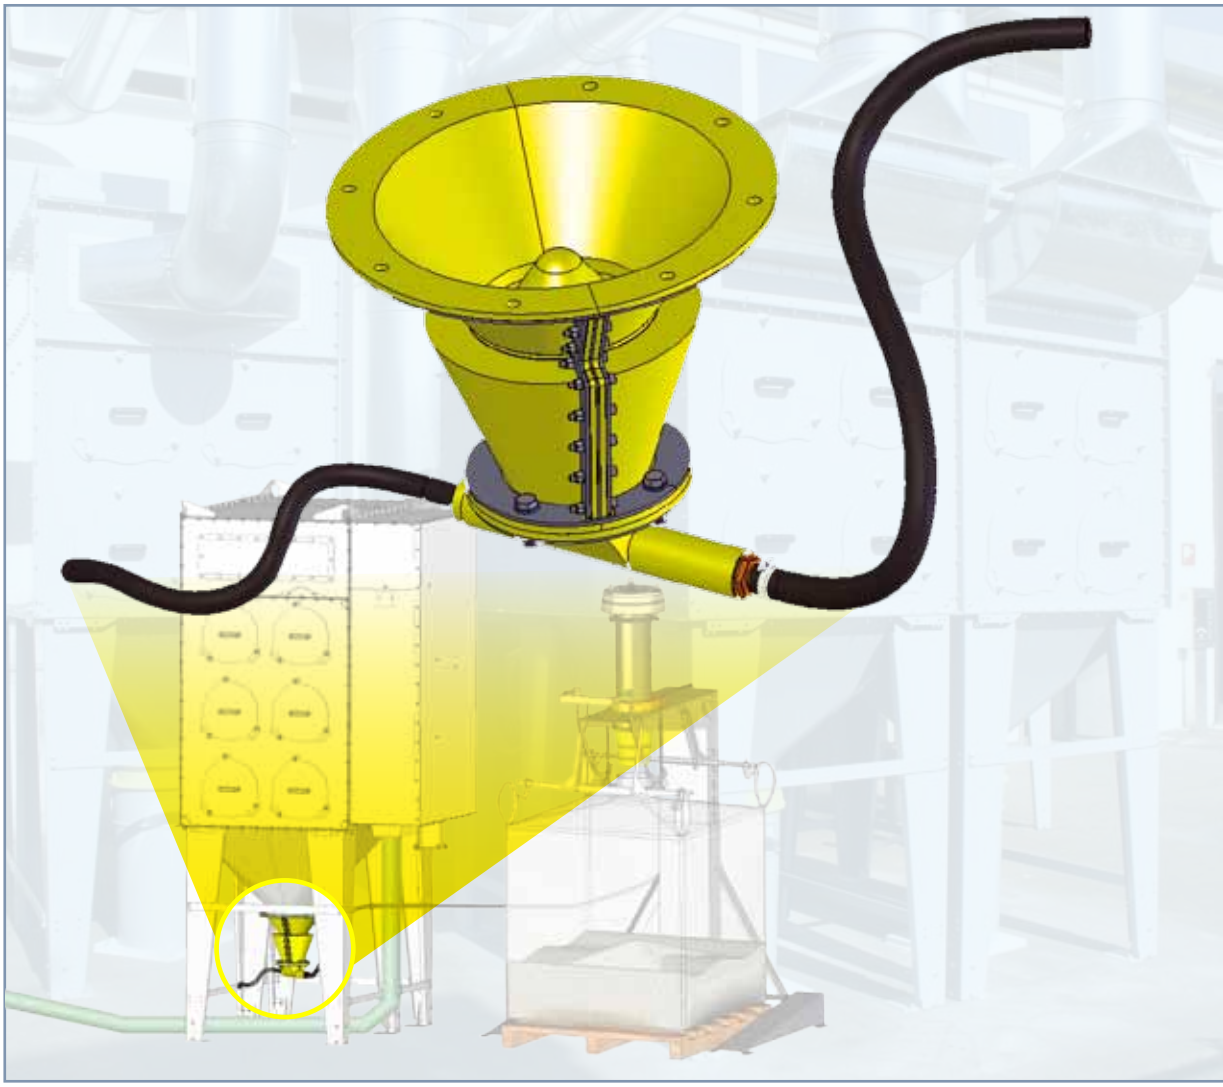

PATENT PENDING

WAMGROUP

WAM®

RECOFIL™

Pneumatic Dust Recovery Device for Fume Filters

- No plant downtime for filter hopper emptying
- Maintenance cost reduction
- Reduced operating costs
- Works with compressed air from filter cleaning system

RECOFIL™

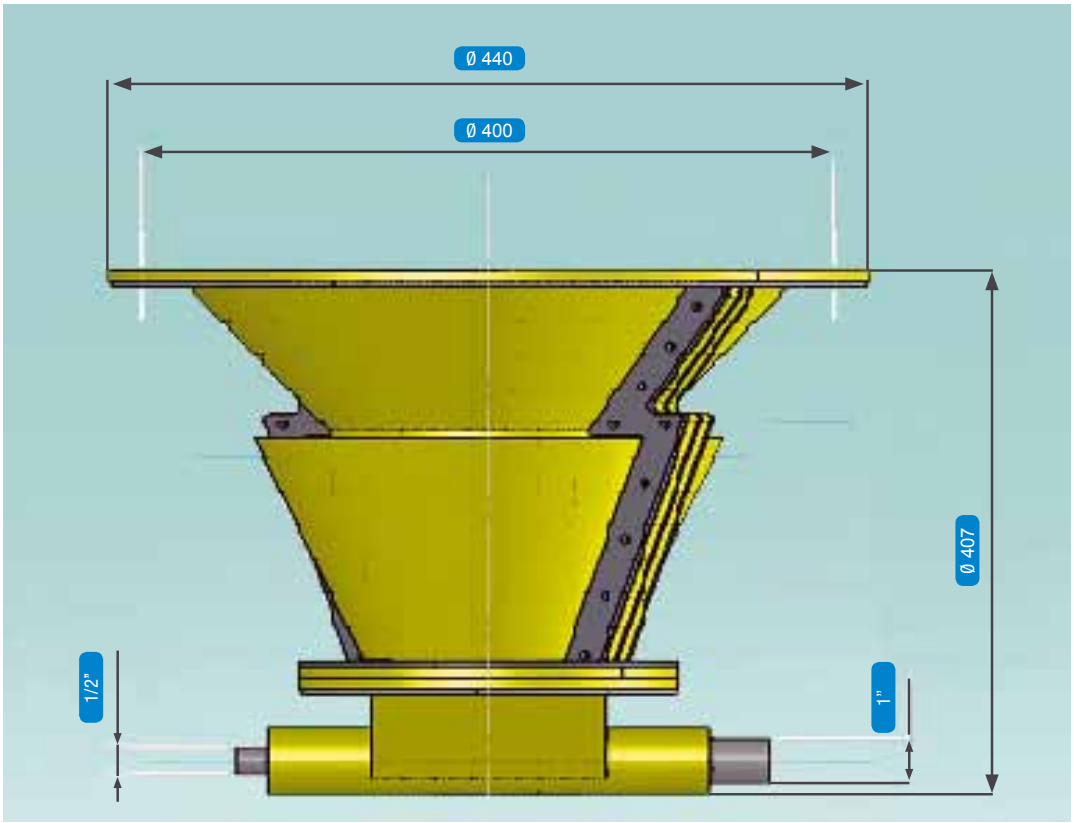

Model	Dust Throughput	Supply Pressure	Air Consumption	Weight
5L	60 kg/h	4 - 6 bar	30 Nm³/h	16 kg

POWERFIL™

Control panel for RECOFIL™

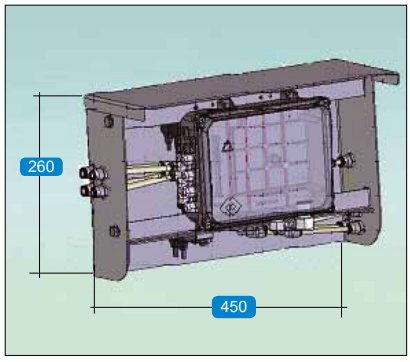

EASYFILL™

FIBC filler with collector and 1m² filter

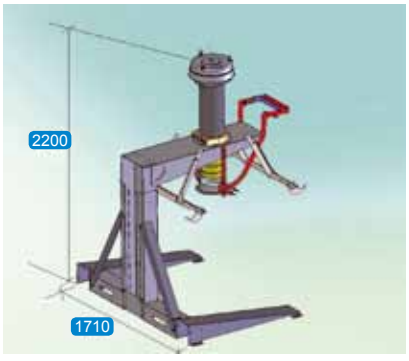

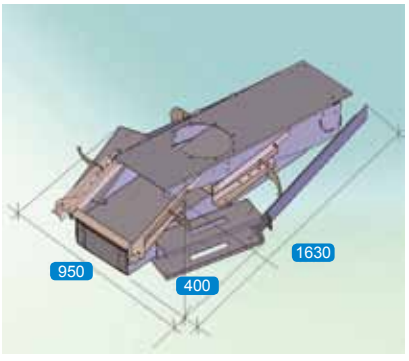

Substantial Operating Cost Reduction

UTILISATION OF RECOFIL™

- No labour for bin emptying required
- Ideal for recovery of polluting dusts (reduced operator exposure for dust emptying)
- Works with compressed air used for filter cleaning (low air consumption)
- Ideal for application on a battery of filter units to fill a single silo or FIBC.

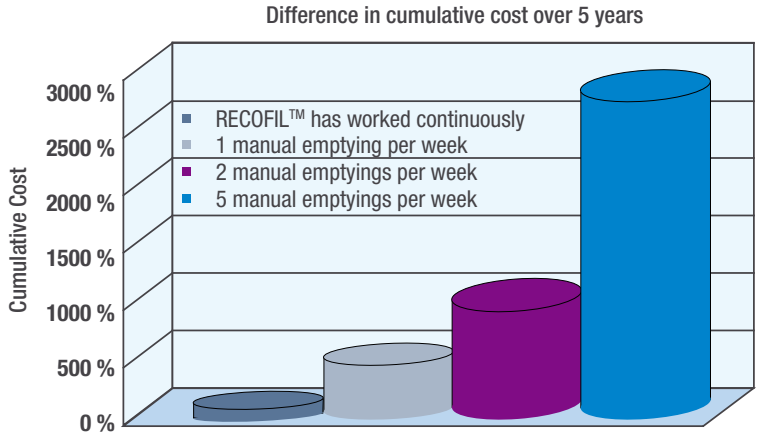

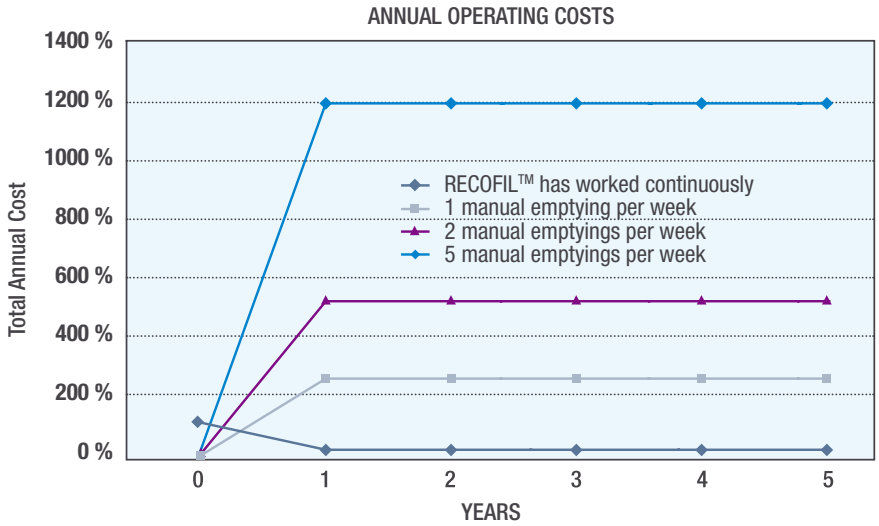

N.B. : Considering 8 hours per day of manual operations by 2 workers + 1 forklift truck; the economic convenience calculation does not include the downstream RBB-type EASYFILL™ collection system.

Applications

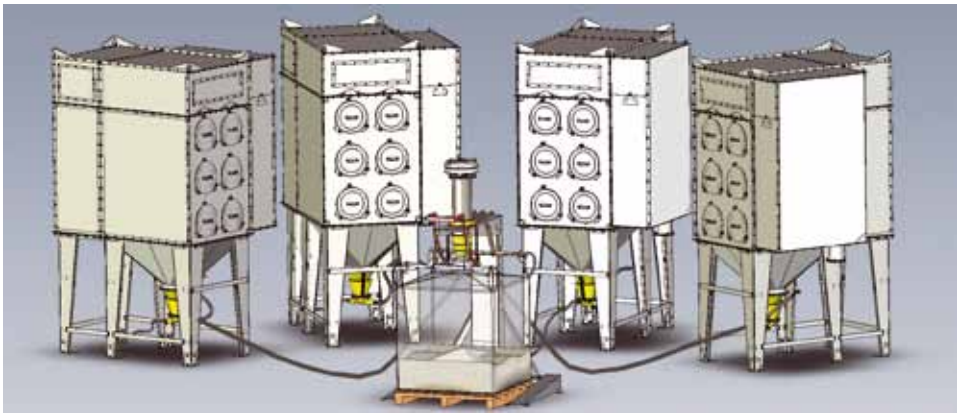

Typical applications:

- Dust collection from filters in suction operation with frequently filled discharge hopper;
- Dust collection from filters in suction operation with high risk of environmental pollution during emptying.

063001626 September 2012

WAMGROUP®

WAM® FLITECH® MAP® EXTRAC® SPECO® TOREX® OLI® RONCUZZI® TECNO CM

WAM®

TÜV SÜD UNI EN ISO 9001 Certified Company

22 Beneficial Way Wangara WA 6065 (08) 6314 1100 (08) 9303 9447
inquip.com.au info@inquip.com.au
ABN 15 130 794 151