

## Rotary Valve RV – RVR



RV



RVR

## HIGH FILLING EFFICIENCY AND PRECISE METERING IN GRAVITY FEEDING AND PNEUMATIC CONVEYING OF PRODUCTS IN POWDER AND GRANULES.

RV and RVR drop through Rotary Valves are designed according to a criteria of maximum applicative universality, suitable for controlled feeding or discharging of products in powder or granular form, from silos, hoppers, pneumatic conveying system, filters or cyclones.


### Features

- Round Inlet Diameter: 150 mm (6") – 200 mm (8") – 250 mm (10") – 300 mm (12 in)
- Square Inlet Dimension: 150x150 mm – 200x200 mm – 250x250 mm – 300x300 mm (6"x6" – 8"x8" – 10"x10" – 12"x12")
- Capacity: 2 – 5 – 10 – 20 litres/rev (0.07 – 0.17 – 0.35 – 0.7 cu ft/rev)
- Working Temperature: from -40 °C up to 150°C
- Working Pressure: from – 0.5 bar up to + 0.3 bar
- Material of construction: Cast Iron, 304 Stainless Steel and 316 Stainless Steel for RV only

### ATEX Approvals

#### RV – RVR... X

ATEX 20/22 Certified

CE  II 1D/3D c T135°C  
0948

#### ATEX Rotary Valve


The ATEX rotary valves are designed and tested for use in potentially explosive zones classified as ZONE 22 or non classified zones and with process atmospheres (inside the valve) classified as ZONE 20 in accordance with Directive 94/9/EC and 1999/92/EC.

Ambient temperature: from -10°C to + 40°C  
Process Temperature (material): from – 20°C to + 60°C  
Atmospheric Pressure: from 0.8 to 1.1 bar  
Maximum rotor speed : 30 rpm  
Minimum Ignition Energy : mie > 3 mJ

#### RV-RVR...E

Cert.No.IBExU11ATEX2014X

EN 15089 - Explosion Isolation System

CE  II 1D/3D c T135°C  
0948

CE  D  
0637


#### Flame Proof and Explosion Protection Device

The RV-RVR...E explosion protection device are ATEX certified for zone 20/22 and are used as a protective and dust explosion-flame proof system up to 1.2 bar.  
Suitable to be used under dust filters, cyclones, product separators, pneumatic conveying and dosing systems within the following conditions:

Ambient temperature: from -10°C to + 40°C  
Process temperature (material): from – 20°C to + 60°C  
Atmospheric Pressure: from 0.8 to 1.1 bar  
Maximum rotor speed : 30 rpm  
Minimum Ignition Energy : mie > 10mJ  
Maximum Explosion Pressure: 1.2 bar

**1.2 BAR**



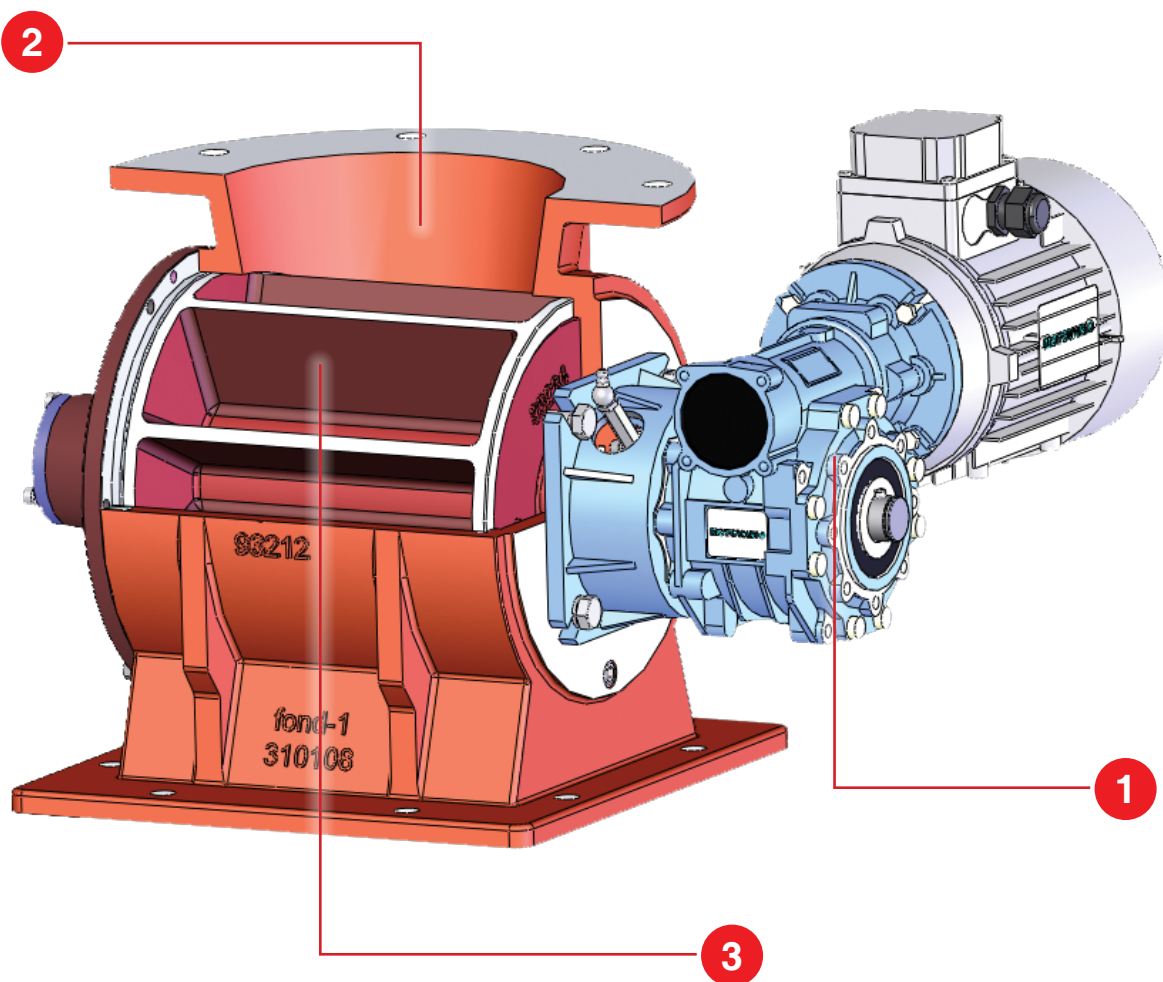

1

## DRIVE UNIT



Bare Shaft



Direct Drive  
(20-30 rpm)



Direct Pre-Torque Gear Box Drive  
(10 rpm)



Mechanic Variable Speed  
(from 4 to 20 rpm)



Chain Transmission  
(10-20-30 rpm)

2


## EXTERNAL HOUSING




Internally Chrome-Plated  
Used for abrasive material



Completely Nickel-Plated  
Used for corrosive material or as a substitute of the Stainless Steel  
for food application when accepted.  
The Rotor and the Side Flange are also completely Nickel-Plated

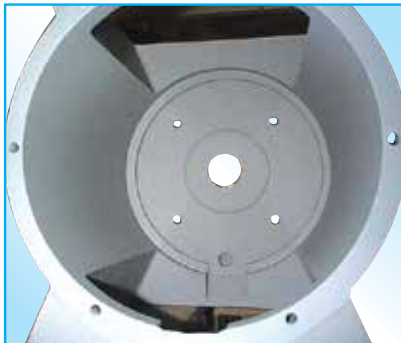

Internally Teflon-Coated  
Used for sticky material  
The Rotor and the Side Flange are also completely Teflon-Coated

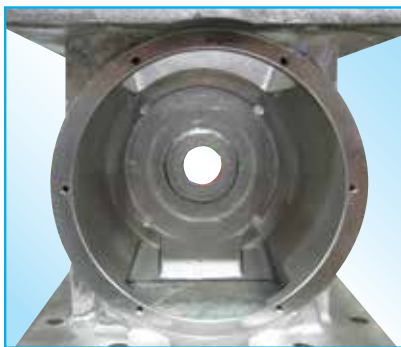

Completely 304 Stainless Steel Casted used for food application. The Rotor and the Side Flanges are also made from 304 Stainless Steel. Also available in 316 Stainless Steel for the RV only

3

## ROTOR



Standard Version



Chamfered Rotor Blades




Rotor with replaceable tips

## Benefits


- ✓ Square or round inlet flanges;
- ✓ Round Flange bolt pattern according to DIN 2576 PN10;
- ✓ Possibility of complete compatibility with WAM® standard of flange drilling on inlet and outlet;
- ✓ Sturdy compact structure;
- ✓ Drive unit mounted directly on shaft without further bearing assembly or coupling;
- ✓ Easy access to internal mechanical parts;
- ✓ Various materials and treatments available depending on material handled;
- ✓ ATEX 20/22 version available;
- ✓ Flame Proof and Explosion Proof Protection Devices certification available.

## Accessories


Vulkollan

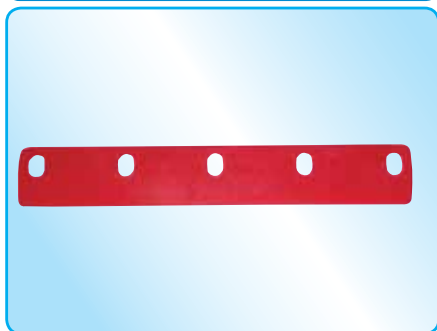


Spring Steel

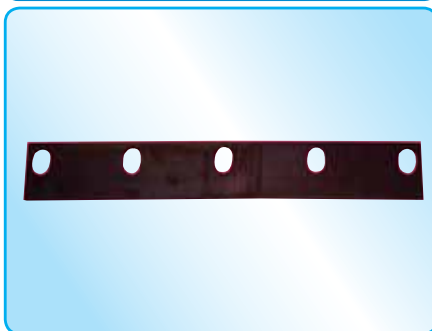

Viton

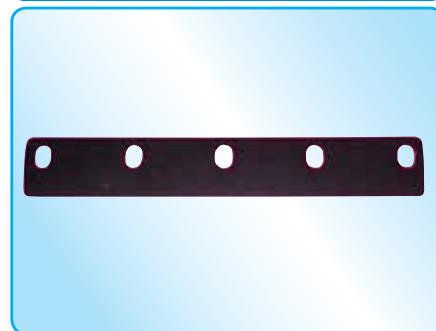


Teflon

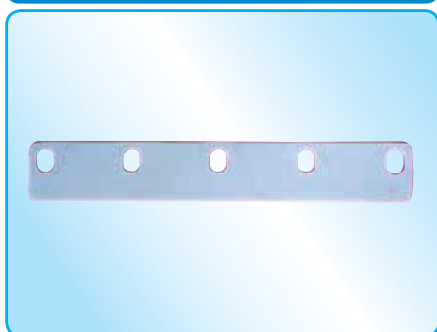


Air Purged Seals



Inlet for Granular Material  
(RV with square flange only)

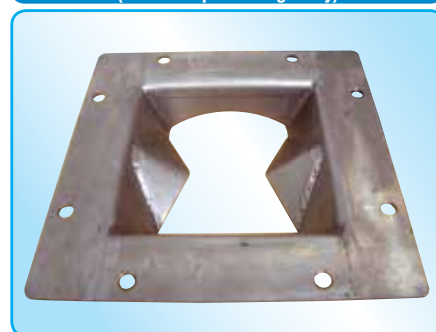

Rotation Indicator

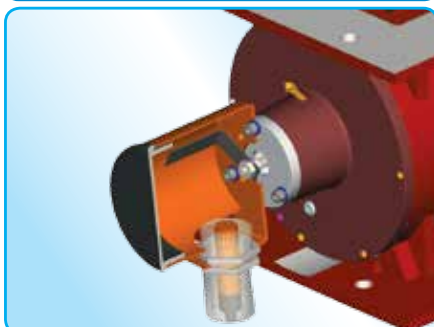

Partial-Rotor Kit



# Applications



03002238 July 2014 Rights reserved to modify technical specifications.



22 Beneficial Way Wangara WA 6065 ☎ (08) 6314 1100 📠 (08) 9303 9447

🌐 [inquip.com.au](http://inquip.com.au) ✉ [info@inquip.com.au](mailto:info@inquip.com.au)

ABN 15 130 794 151

PRODUCT » DENSITY » FLOW