

Polymer Pressure Relief Valve VHS-C



PATENT PENDING



Polymer Pressure Relief Valve VHS-C

SAFETY FOR:



PLANT
PEOPLE
ENVIRONMENT

VHS Pressure Relief Valves consist of a cylindrically shaped body with flanged connection spigot to the silo, an exhaust outlet spout for duct connection, an elastic diaphragm able to re-establish pressure balance instantaneously, a counterweight kit to keep the valve closed under normal conditions, and a weather protection cover.



Benefits

- ✓ Safety for people, plant and environment
- ✓ Compliance with regulations in force
- ✓ Maximum efficiency, minimum operating costs
- ✓ Quick and easy maintenance
- ✓ Attractive price



Silo workspace using spring-loaded valve



Silo workspace using VHS valve

Technical Features and Accessories

Provision for inductive proximity sensors

Excess pressure weights

Weather protection cover

Emission duct

Diaphragm



Handle

Weld-on spigot

SINT™ engineering polymer body

Comparison between purchase price and management costs of VHS vs Traditional Pressure Relief Valves

The analysis is carried out considering the total costs of the VHS Press Relief Valve equal to 100 (index number). Therefore, the unit costs of a standard press relief valve are referred to the base value = 100 to assess the cost of each operating activity and the total costs compared to the VHS Press Relief Valve.

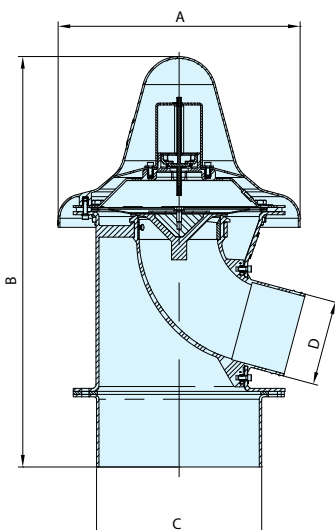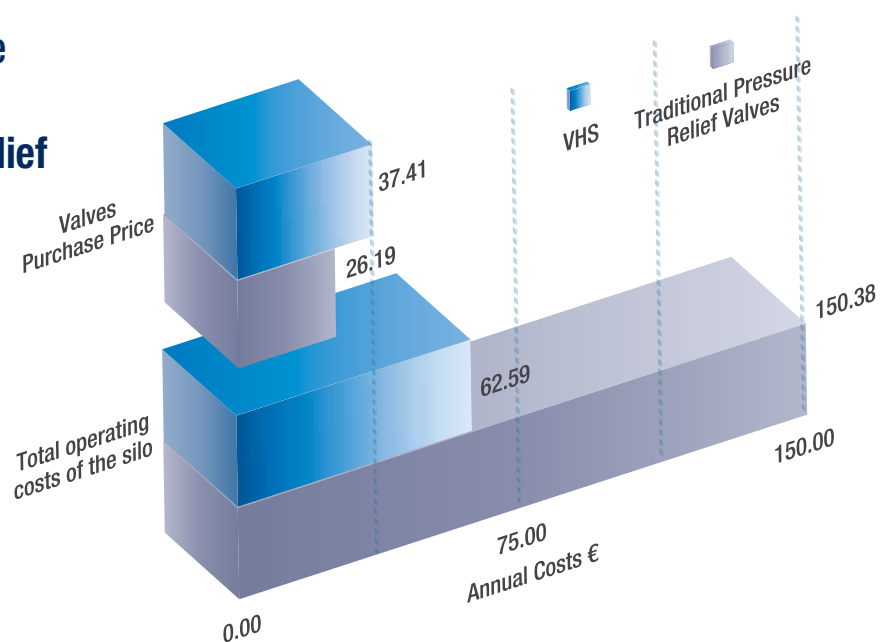

VHS273	Excess Pressure	Negative Pressure	kg
Standard-type	500 mm H ₂ O	-50 mm H ₂ O*	8.0
Option	300 ~ 1,000 mm H ₂ O*	-50 mm H ₂ O*	

A	B	C	D
Ø 366 mm	557 mm	Ø 273 mm	Ø 140 mm

Application



06/30/2010 November 2012 Rights reserved to modify technical specifications.



WAM®



WAMGROUP



UNI EN ISO 9001
Certified Company



WAM®



FLITECH®



MAP®



EXTRAC®



SPECOL®



TOREX®



OLI®



RONCUZZI®



TECNO CM