

K-Shaker Vibrating Roller

The K-Shaker Vibrating Roller discs clamp on to a standard 114 mm diameter return conveyor roller. The vibration caused by the discs can help to “knock-off” carry back in a convenient location for cleaning up. The ideal installation is directly over a stockpile, bin or vibrating screen.

The discs are supplied with a separate clamp, or as a roller assembly. The vibrating roller will work in either direction, and is not affected by damaged belts with mechanical fasteners.





They are most effective at medium belt speeds and do not require any further attention after installation. The polyurethane discs are durable and their unique shape and hardness ensures continuous belt contact.

Key Benefits

- Easy to Fit
- Cost Effective
- Maintenance Free
- Suitable for all Belt Widths



K-Shaker Vibrating Roller

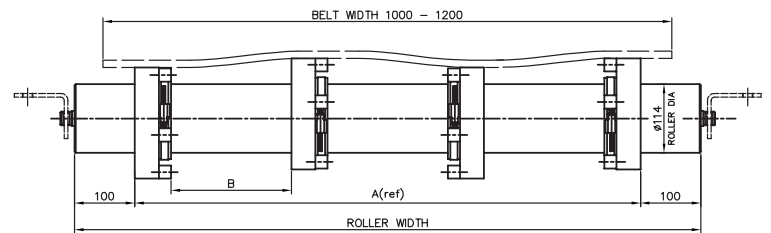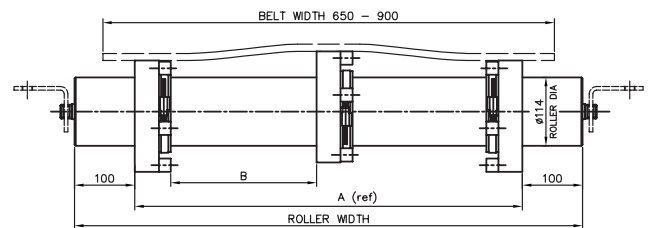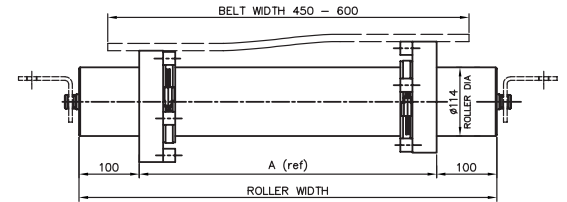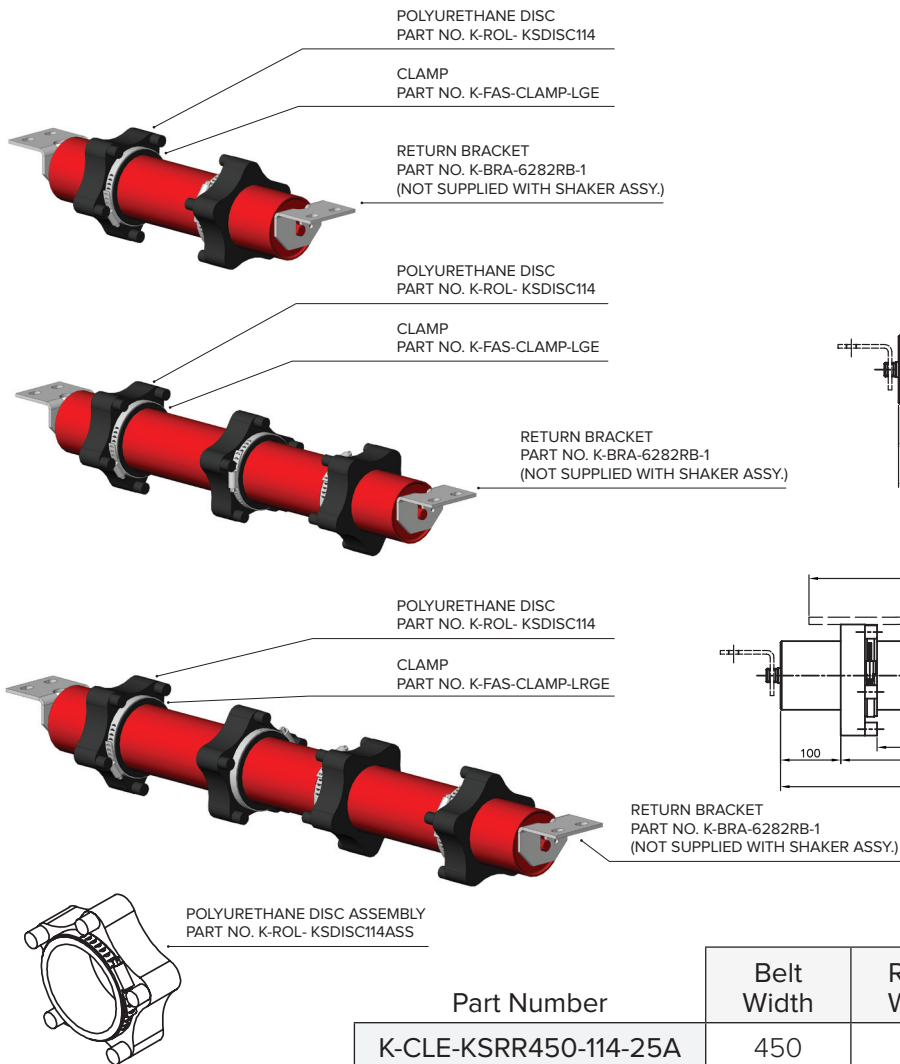

Part Number	Belt Width	Roller Width	Disc's No.	A(ref) mm	B mm
K-CLE-KSRR450-114-25A	450	544	2	344	-
K-CLE-KSRR500-114-25A	500	594	2	394	-
K-CLE-KSRR600-114-25A	600	694	2	494	-
K-CLE-KSRR650-114-25A	650	744	3	544	182
K-CLE-KSRR750-114-25A	750	844	3	644	232
K-CLE-KSRR900-114-25A	900	994	3	794	307
K-CLE-KSRR1000-114-25A	1000	1094	4	894	218
K-CLE-KSRR1050-114-25A	1050	1144	4	944	235
K-CLE-KSRR1200-114-25A	1200	1294	4	1094	285